

PRODUCT DATA

Decking Strips

Andrews Coatings Ltd
Carver Building
Littles Lane
Wolverhampton
West Midlands
WV1 1JY

Tel. 01902 429190

info@rustoleumdirect.co.uk
www.rustoleumdirect.co.uk




DECKING STRIPS

Made from tough fibreglass with anti slip grit top surface. These strips are the ideal solution to help with slippery decking areas. The GRP pultruded strips come complete with pre-drilled holes and screw fixings. Simply lay the strips on top of your decking and screw through the pre-drilled holes into the timber to secure the strips in place. It couldn't be easier.

BENEFITS

- Extremely durable anti slip surface
- Easy to install
- Waterproof and Rot proof
- Pre-drilled for screw fixing (screws included)
- Choice of 3 widths
- Choice of 2 lengths
- Available in different colours
- Suitable for domestic and commercial use

QUICK & EASY INSTALLATION

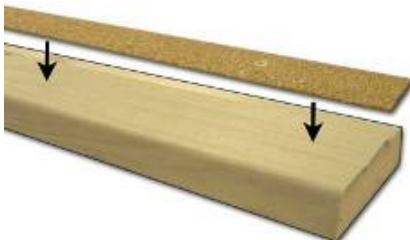

PRODUCT DATA

Decking Strips

Andrews Coatings Ltd
Carver Building
Littles Lane
Wolverhampton
West Midlands
WV1 1JY

Tel. 01902 429190

info@rustoleumdirect.co.uk
www.rustoleumdirect.co.uk

REFERENCE PROJECTS



PRODUCT DATA


Decking Strips

Andrews Coatings Ltd
Carver Building
Littles Lane
Wolverhampton
West Midlands
WV1 1JY


Tel. 01902 429190

info@rustoleumdirect.co.uk
www.rustoleumdirect.co.uk

COLOURS AVAILABLE

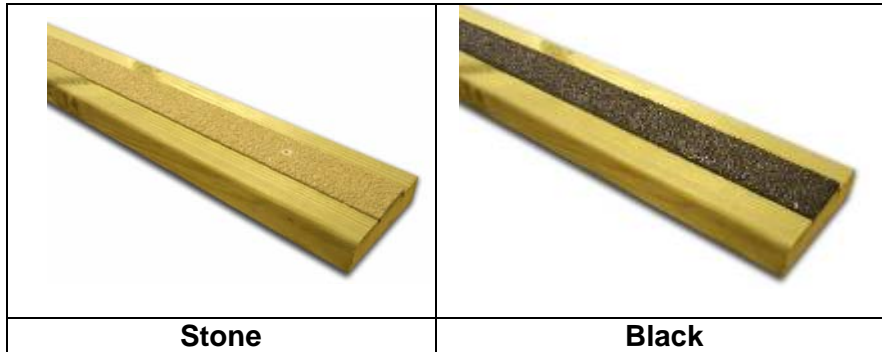

SIZES AVAILABLE

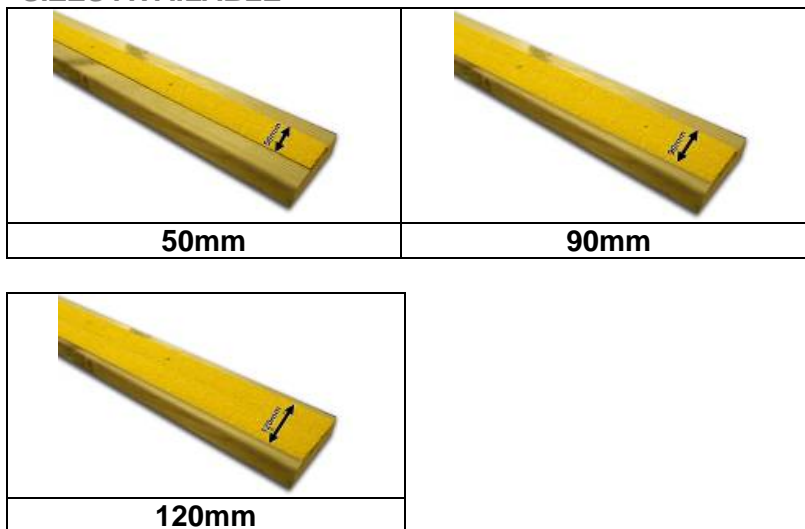

Each decking strip is 3mm thick with each edge chamfered so as to not cause a trip hazard. The grit top surface is made from a tough hard wearing aggregate that offers extreme slip resistance in most weather conditions.

Description:	Anti Slip Decking Strips
Design:	Pultruded fibreglass profile with pre-drilled holes
Size:	3mm thick, 50mm, 90mm and 120mm deep, 1200mm and 2400mm long with chamfered edges
Weight:	0.5 kg per metre
Service temperatures:	-20 to +80°C
Stock Colours:	Stone, Yellow or Black
General use:	Standard pedestrian / Some vehicle traffic

PRODUCT DATA

Decking Strips

Andrews Coatings Ltd
Carver Building
Littles Lane
Wolverhampton
West Midlands
WV1 1JY

Tel. 01902 429190

info@rustoleumdirect.co.uk
www.rustoleumdirect.co.uk

Decking Strips – Pre-drilled hole configuration

50mm Wide

1200 mm – one row of 7 holes (6 mm diameter), 50mm in from each end and then approx. 183 mm centres. Supplied with zinc plated wood screws.

2400 mm – one row of 11 holes (6 mm diameter), 50 mm in from each end and then approx. 230 mm centres. Supplied with zinc plated wood screws.

90mm Wide

1200 mm – one row of 7 holes (6 mm diameter), 50 mm in from each end and then approx. 183 mm centres. Supplied with zinc plated wood screws.

2400 mm – one row of 11 holes (6 mm diameter), 50 mm in from each end and then approx. 230 mm centres. Supplied with zinc plated wood screws.

120mm Wide

1200 mm – two row of 5 holes (10 total), (6mm diameter), 50 mm in from each end and then approx. 275 mm centres. Supplied with zinc plated wood screws.

2400 mm – two row of 5 holes (10 total), (6 mm diameter), 50 mm in from each end and then approx. 287mm centres. Supplied with zinc plated wood screws.

Safety

When installing the product, standard personal protective equipment should be worn as a minimum. These include a dust mask (or similar), safety goggles, heavy duty gloves and overalls. If required, the product should be cut in a well ventilated area or close to extraction points. Dust residue can be disposed of using normal waste disposal methods. No special permissions or licenses are required.