

## FINE CRACK REPAIR MORTAR

A NON SHRINK LIQUID EPOXY FILLER FOR FINE CRACKS OR SMALL HOLES IN CONCRETE FLOORS



**203010.0.5**  
500 ml

- Solvent-free Epoxy (2-part)
- For repairing fine cracks up to 3 mm wide
- Dry in 3-4 hours
- Coverage: 25 linear metres (2mm wide, 5mm deep)



1 Stir the contents of component A



2 Mix component A and B and stir



3 Pour mixture in the crack and level off with scraper

## CLEANER/DEGREASER

A READY TO USE CLEANER/DEGREASER FOR FLOORS



**2901.5**  
5l

*Ideal for surface preparation*

- Removes grease, oil and other contaminations
- Virtually odour free
- Non-flammable
- 6-8 m<sup>2</sup>/l coverage


## CONCRETE REPAIR MORTAR

SIMPLY ADD WATER, STIR AND APPLY



- Easy to use - Add water, stir and ready
- Traffic allowed after 24 hours
- Recoatable after 48 hours
- 10 kg (1-component) – 0.4 m<sup>2</sup>
- Sandable to a smooth finish
- Tools can be cleaned with water

**NOTE:** Not to be recoated with 7100 Floor coating!

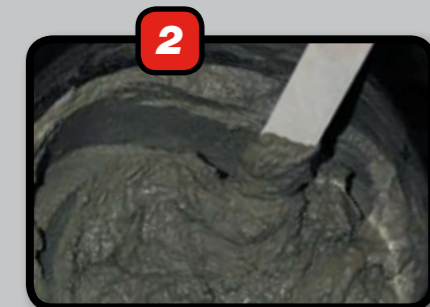

**FREE**  
included in kit

**203012.10**  
10 Kg

