

4200

HEAT RESISTANT SYSTEM

Single pack primer and aluminium topcoat



425 °C

Technical reference

	Solvent based
Coverage:	Primer: 9.8 m ² /l. at 35 µm dry, Topcoat: 16 m ² /l. at 15 µm dry
Dry to touch:	Primer: 30 min, Topcoat: 2 hrs
Dry to recoat:	Primer: 24 hrs, Topcoat: 24 hours
Colours:	Orange, Topcoat: Aluminium
Pack sizes:	5L
Substrates:	New, bare or blasted steel in sheltered or interior environments
Recoatable with:	Not applicable

- One topcoat is sufficient over primer 4268
- Silicon modified alkyd
- Heat-resistant up to 425°C
- Rust inhibitive primer
- Topcoat pigmented with aluminium
- Topcoat has long-term gloss retention
- Lead-free

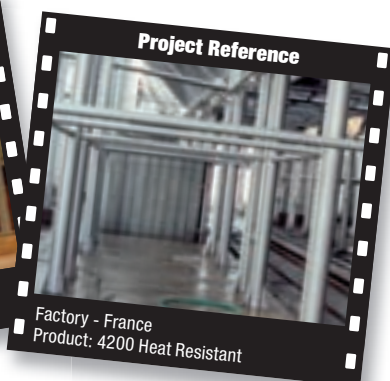
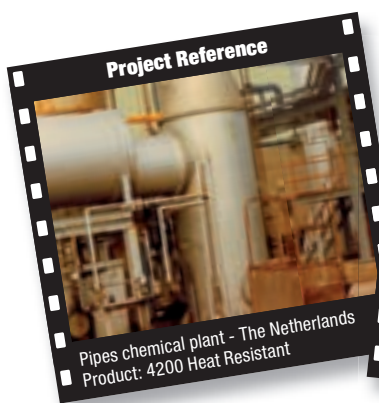


photo: Gregor Buir