

# 5130 PRIMER DSP

## DAMP SURFACE PRIMER

2 component epoxy impregnation primer

**Prevents air/moisture blistering on concrete and asphalt balcony surfaces, etc.**

- Resistant to vapour pressure and damp from the substrate
- Solids content 96 vol%
- Application by brush or roller
- Can be applied to concrete and asphalt
- Recoatable with RUST-O-THANE® SL and other epoxy or polyurethane coatings

### Technical reference

	Solvent based
<b>Coverage:</b>	max. 4 m <sup>2</sup> /l.
<b>Dry to touch:</b>	6 hrs
<b>Dry to recoat:</b>	16 hrs (<48 hrs)
<b>Colours:</b>	White, semi-transparent
<b>Pack sizes:</b>	2.5L
<b>Substrates:</b>	Damp concrete/asphalt surfaces
<b>Recoatable with:</b>	RUST-O-THANE® SL 5182

# 9100

## HIGH PERFORMANCE EPOXY SYSTEM


2-Pack Epoxy system for optimal protection in only one or two layers



- Very resistant to abrasion
- Suitable for frequent cleaning with chemicals
- 100-150 micron in a single layer
- Available as Standard, High Solids or Winter Grade (0 °C)

### Technical reference

	Solvent based
<b>Coverage:</b>	6-7 m <sup>2</sup> /l. (varies by activator used)
<b>Dry to touch:</b>	6-8 hrs (varies by activator used)
<b>Dry to recoat:</b>	16 hrs (<72 hrs)
<b>Colours:</b>	See colour card + tintable
<b>Pack sizes:</b>	1L, 5L
<b>Substrates:</b>	Concrete, primers 5401 and 3333, sound rusted steel, bare metal, primers 569, 9169, 9170/80, concrete and primers 5401 and 3333.
<b>Recoatable with:</b>	RUST-O-THANE® 9600/9200/9900

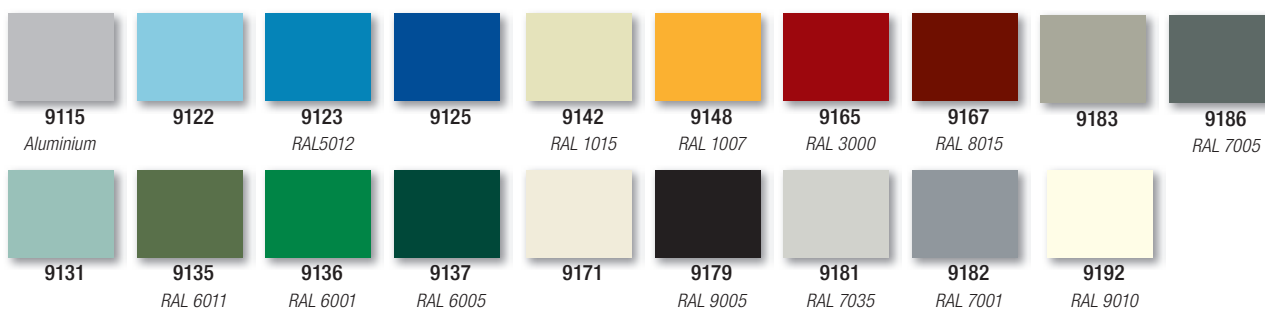

Available in almost any colour upon request (RAL, BS, AFNOR, etc.)  
Note: Minor differences between printed and supplied colours are possible due to printing limitations



GENERAL

General Purpose  
METAL

Noxydizing™  
METAL

Cladding Solutions  
METAL

FLOORS

EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL