


5400

SELF-LEVELLING EPOXY SYSTEM

2-component epoxy mortar and coating in one



- Mortar and coating in one
- Application of 2-4 mm in one coat
- No VOC emission and low odour
- Smooth and seamless finish
- Excellent resistance against impact, heavy traffic and chemicals

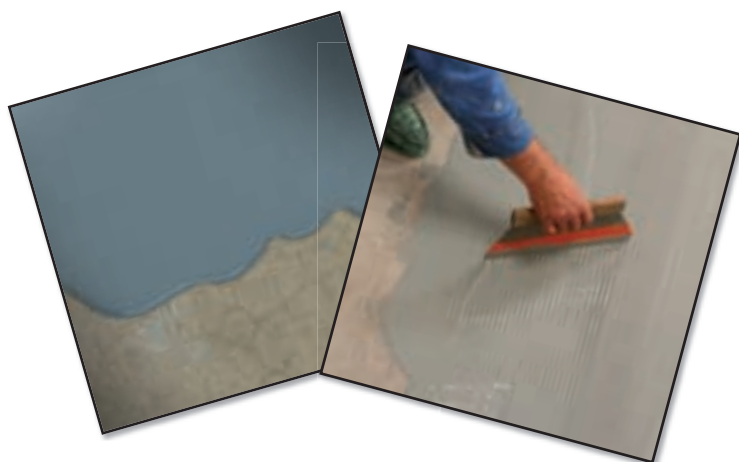

Technical reference

	Solvent-free
Coverage:	2 kg/m ² at 1 mm thickness
Dry to touch:	16 hrs
Dry to recoat:	36 hrs
Colours:	Steel grey
Pack sizes:	25kg
Substrates:	Horizontal concrete floors
Recoatable with:	RUST-O-THANE® 9600



5170

SELF-LEVELLING EPOXY SYSTEM

2-component solvent-free epoxy coating



- Self-levelling
- High mechanical strength
- Low odour
- From 0.5 – 3 mm thickness
- Provides a smooth and seamless surface

To flatten out rough concrete floors.



Technical reference

	Solvent-free
Coverage:	2 kg/m ² at 1 mm thickness
Dry to touch:	3 hrs
Dry to recoat:	16 hrs (<24 hrs)
Colours:	Transparant
Pack sizes:	25kg
Substrates:	Rough concrete and cement screed floors
Recoatable with:	5400, 5500, 9100, RUST-O-THANE® 9600

GENERAL

General Purpose
METAL

Noxydizing™
METAL

Cladding Solutions
METAL

FLOORS

EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL