

5900

WATERBASED EPOXY SYSTEM


2-Pack epoxy floor coating



- Primer, impregnator and topcoats
- Very low solvent content
- Fast drying
- Applied directly to slightly damp surfaces
- Good chemical and wear resistance
- Low odour during application

Technical reference

	Water based
Coverage:	Topcoat: 6.5 m ² /l. at 50 µm dry
Dry to touch:	4 hrs
Dry to recoat:	6 hrs
Colours:	See colour card
Pack sizes:	5L
Substrates:	Concrete floors & walls, masonry, mineral fibre board. Porous substrates should be primed with diluted 5910 transparent
Recoat with:	9200 RUST-O-THANE®

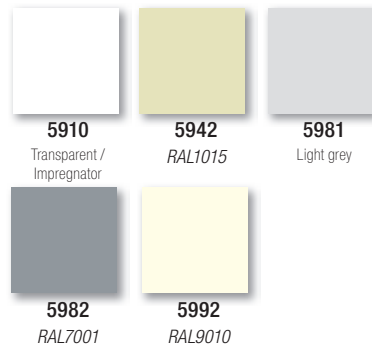

Available in almost any colour upon request (RAL, BS, AFNOR, etc.)
 Note: Minor differences between printed and supplied colours are possible due to printing limitations.

5500

SOLVENT FREE EPOXY SYSTEM


2-Pack epoxy floor coating



5500 coating applied on electrical component factory floor in The Netherlands

100% solids contents

- To clean easily and quickly
- Strong resistance to abrasion
- Excellent protection against chemical products
- For concrete, masonry or steel, floors and walls
- Class 1 surface spread of flame - BS 476 part 7
- Withstands frequent cleaning

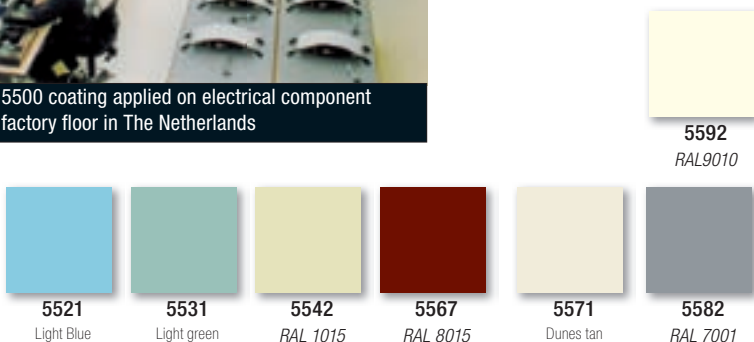

Technical reference

	Solvent-free
Coverage:	6.7 m ² /l. at 150 µm dry
Dry to touch:	24 hrs
Dry to recoat:	24 hrs (<72 hrs)
Colours:	See colour card
Pack sizes:	4L
Substrates:	Concrete, masonry, blasted steel, primers 5401, 3333, 9170/80
Recoat with:	RUST-O-THANE® 9200