

# 5900

## WATER BASED EPOXY SYSTEM

**Low odour and quick drying**

- Very low solvent content
- Virtually odourless during application
- Quick drying and quickly recoatable
- Can be applied directly to slightly damp surfaces
- Good chemical and wear resistance
- Easy 1:1 mixing ratio

***No production stop required!***




*With the 5900 coating, production can continue whilst painting thanks to its low VOC content and quick drying properties.*



### Technical reference

	Water based
<b>Coverage:</b>	Primer: 6.8 m <sup>2</sup> /l. at 50 µm dry Topcoat: 6.5 m <sup>2</sup> /l. at 50 µm dry
<b>Dry to touch:</b>	4 hrs
<b>Dry to recoat:</b>	6 hrs
<b>Colours:</b>	Primer: grey, Topcoat: see colour card
<b>Pack sizes:</b>	5L
<b>Substrates:</b>	Bare/galvanised steel, concrete floors & walls, masonry, mineral fibre board.
<b>Recoatable with:</b>	9200 RUST-O-THANE®

### Standard colours:

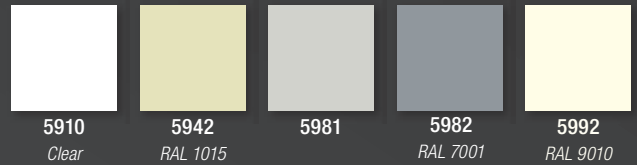

Available in almost any colour

Note: Minor differences between above printed and supplied colours is possible.

