

8300


MOULD RESISTANT COATING

Single pack quick drying hygienic coating

- Vinyl acrylic polymer for walls and ceilings, 1-component
- Contains non-leaching fungicides
- Ideal for use in low temperature areas
- Non-yellowing and resistant to frequent cleaning
- Can be applied and will dry below 0°C
- Fast drying and low odour

IDEAL FOR REFRIDGERATED AREAS

QUICK DRYING, EVEN BELOW 0°C

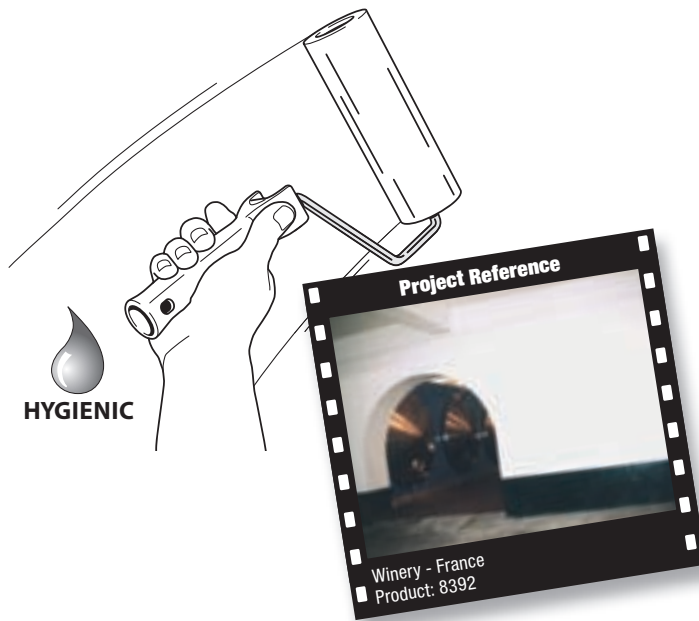


Technical reference	
	Solvent based
Coverage:	10.5 m ² /l. at 35 µm dry
Dry to touch:	2 hrs (see product datasheet)
Dry to recoat:	6 hrs
Colours:	See colour card
Pack sizes:	5L, 20L
Substrates:	Mineral substrates primed with sealer 8399
Recoatable with:	Itself



Topcoat and Sealer



Standard colours:

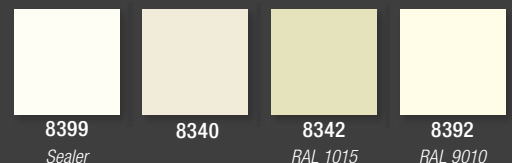

Available in other colours upon request
 Note: Minor differences between above printed and supplied colours is possible.