

**RUST-O-THANE® Polyurethane Finishes: Excellent protection against U.V., frequent**

# RUST-O-THANE® 9600


## FLEXIBLE HIGH GLOSS POLYURETHANE TOPCOAT

**Excellent protection against harsh chemicals, cleaning and high humidity**

- Outstanding colour and gloss retention
- Easy to apply
- Resistant to solvents and chemical cleaning agents
- High resistance to abrasion
- Long-lasting high gloss finish
- Also suitable for floors or walls



**Standard colours:**

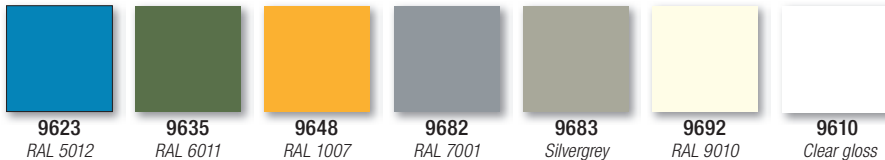

Available in almost any colour upon request (RAL, BS, AFNOR, etc.)  
 Note: Minor differences between printed and supplied colours are possible due to printing limitations.



**Technical reference**

	Solvent based
<b>Coverage:</b>	13.2 m <sup>2</sup> /l. at 40 µm dry
<b>Dry to touch:</b>	6 hrs (use 9996 accelerator for shorter dry times)
<b>Dry to recoat:</b>	16 hrs (use 9996 accelerator for shorter dry times)
<b>Colours:</b>	See colour card + tintable
<b>Pack sizes:</b>	1L, 5L
<b>Substrates:</b>	Metal and concrete prepared with RUST-OLEUM® epoxy systems
<b>Recoatable with:</b>	Not applicable



### 9996 ACCELERATOR



Use 9996 accelerator to reduce drying times to:

To touch: 9600: 1 hr / 9900: 2 hrs  
 To recoat: 9600: 4 hrs / 9900: 4 hrs

**FOR RUST-O-THANE® 9600 and  
 RUST-O-THANE® 9900**

