

RUST-O-THANE® Polyurethane Finishes: Excellent protection against U.V., frequent

RUST-O-THANE® 9600


FLEXIBLE HIGH GLOSS POLYURETHANE TOPCOAT

Excellent protection against harsh chemicals, cleaning and high humidity

- Outstanding colour and gloss retention
- Easy to apply
- Resistant to solvents and chemical cleaning agents
- High resistance to abrasion
- Long-lasting high gloss finish
- Also suitable for floors or walls



Standard colours:

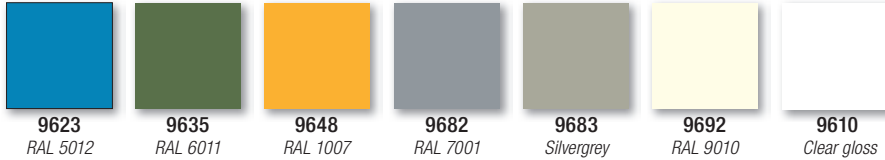

Available in almost any colour upon request (RAL, BS, AFNOR, etc.)
 Note: Minor differences between printed and supplied colours are possible due to printing limitations.



Technical reference

	Solvent based
Coverage:	13.2 m ² /l. at 40 µm dry
Dry to touch:	6 hrs (use 9996 accelerator for shorter dry times)
Dry to recoat:	16 hrs (use 9996 accelerator for shorter dry times)
Colours:	See colour card + tintable
Pack sizes:	1L, 5L
Substrates:	Metal and concrete prepared with RUST-OLEUM® epoxy systems
Recoatable with:	Not applicable



9996 ACCELERATOR



Use 9996 accelerator to reduce drying times to:

To touch: 9600: 1 hr / 9900: 2 hrs
 To recoat: 9600: 4 hrs / 9900: 4 hrs

**FOR RUST-O-THANE® 9600 and
 RUST-O-THANE® 9900**

