

# 9900

## RUST-O-THANE®

High build polyurethane for an excellent protection


- Excellent resistance against chemicals
- Withstands high humidity and moisture conditions
- High abrasion resistance and shock resistant
- In virtually any colour
- Excellent gloss retention
- Excellent durability
- Drying can be accelerated with Accelerator 9996

### Technical reference

	Solvent based
<b>Coverage:</b>	8 m <sup>2</sup> /l. at 75 µm dry
<b>Dry to touch:</b>	6 hrs (use 9996 accelerator for shorter dry times)
<b>Dry to recoat:</b>	8 hrs (use 9996 accelerator for shorter dry times)
<b>Colours:</b>	Tintable
<b>Pack sizes:</b>	5L
<b>Substrates:</b>	Concrete, 9100 epoxy, primers 5401 and 3333, manually prepared rusted metal, clean or blasted metal
<b>Recoat with:</b>	Not applicable



Available in almost any colour

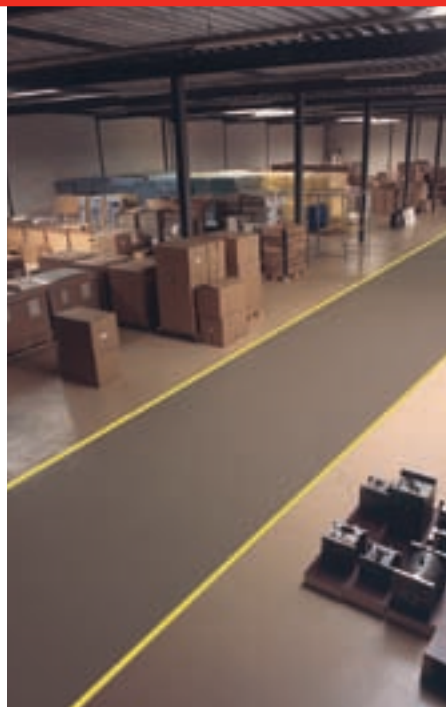

GENERAL

METAL  
General Purpose

METAL  
Noxydizing™

METAL  
Cladding Solutions

FLOORS

# 5182

## RUST-O-THANE® SL

High-build, self-levelling polyurethane topcoat

- Solvent free, virtually odourless
- Extremely durable and long lasting
- Excellent chemical, oil and grease resistance
- Easy maintenance and cleaning
- Anti-slip finish as an option (page 40)
- Waterproofing properties
- Ideal for use with 5130 Primer DSP

*Ideal for balconies and external walkways!*

### Technical reference

	Solvent-free
<b>Coverage:</b>	2 kg/m <sup>2</sup> at 1.3 mm dry
<b>Dry to touch:</b>	2 hrs
<b>Dry to recoat:</b>	6 hrs (<24 hrs)
<b>Colours:</b>	RAL 7001
<b>Pack sizes:</b>	6 kg
<b>Substrates:</b>	Clean, sound concrete
<b>Recoat with:</b>	Not applicable



5182  
RAL 7001



EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL