

9900

RUST-O-THANE®

High build polyurethane for an excellent protection


- Excellent resistance against chemicals
- Withstands high humidity and moisture conditions
- High abrasion resistance and shock resistant
- In virtually any colour
- Excellent gloss retention
- Excellent durability
- Drying can be accelerated with Accelerator 9996

Technical reference

	Solvent based
Coverage:	8 m ² /l. at 75 µm dry
Dry to touch:	6 hrs (use 9996 accelerator for shorter dry times)
Dry to recoat:	8 hrs (use 9996 accelerator for shorter dry times)
Colours:	Tintable
Pack sizes:	5L
Substrates:	Concrete, 9100 epoxy, primers 5401 and 3333, manually prepared rusted metal, clean or blasted metal
Recoat with:	Not applicable



Available in almost any colour

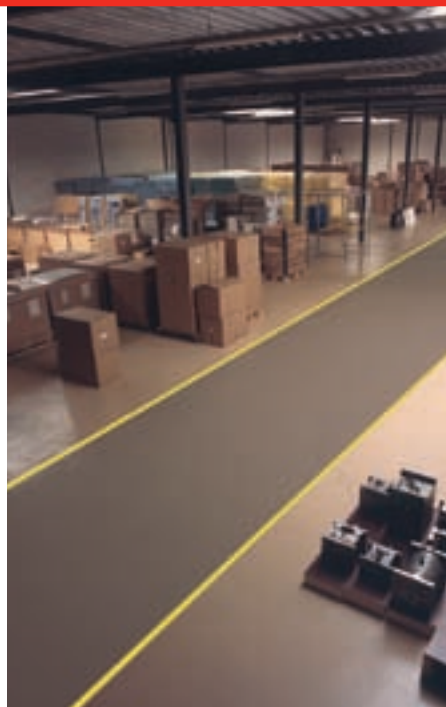

GENERAL

METAL
General Purpose

METAL
Noxydizing™

METAL
Cladding Solutions

FLOORS

5182

RUST-O-THANE® SL

High-build, self-levelling polyurethane topcoat

- Solvent free, virtually odourless
- Extremely durable and long lasting
- Excellent chemical, oil and grease resistance
- Easy maintenance and cleaning
- Anti-slip finish as an option (page 40)
- Waterproofing properties
- Ideal for use with 5130 Primer DSP

Ideal for balconies and external walkways!

Technical reference

	Solvent-free
Coverage:	2 kg/m ² at 1.3 mm dry
Dry to touch:	2 hrs
Dry to recoat:	6 hrs (<24 hrs)
Colours:	RAL 7001
Pack sizes:	6 kg
Substrates:	Clean, sound concrete
Recoat with:	Not applicable



5182
RAL 7001



EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL