

# B95

## FLEXIBLE EPOXY SYSTEM

Excellent corrosion-, wear- and impact resistance




## Outstanding corrosion protection in heavy industrial or coastal areas

Epoxy coating with the advantages of an elastic paint.

- Virtually solvent-free
- Hard-wearing and impact proof finish
- Outstanding corrosion protection in heavy industrial or coastal areas
- Low odour during application
- Ideal for airless application
- Semi-gloss finish
- 1:1 mixing ratio



Impact resistant

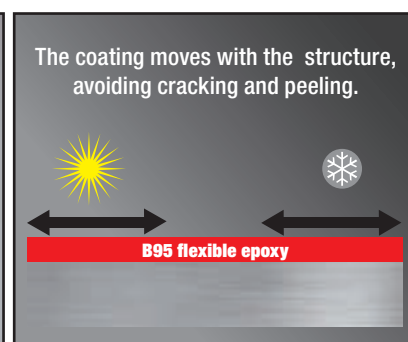


Flexible

The coating moves with the structure, avoiding cracking and peeling.

### Technical reference

	Solvent-free
<b>Coverage:</b>	6.6 m <sup>2</sup> /l. at 150 µm dry
<b>Dry to touch:</b>	8 hrs
<b>Dry to recoat:</b>	12 hrs
<b>Colours:</b>	See colour card
<b>Pack sizes:</b>	10L
<b>Substrates:</b>	Manually prepared-, bare-, galvanised- or primed metal, concrete and masonry, primers 5401 and 3333.
<b>Recoatable with:</b>	RUST-O-THANE® 9600

### Standard colours:

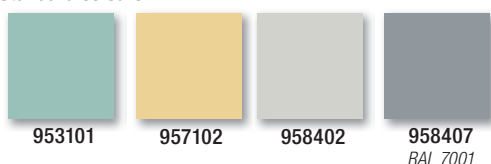

953101

957102

958402

958407

RAL 7001

Available in almost any colour upon request (RAL, BS, AFNOR, etc.)

Note: Minor differences between printed and supplied colours are possible.

### Outstanding corrosion protection in heavy industrial or coastal areas

