


B95 SL

SELF-LEVELLING EPOXY SYSTEM

2-component flexible floor coating

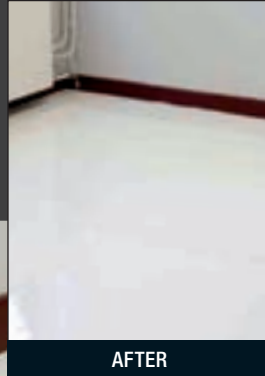

- Very low solvent content
- Applied directly to damp surfaces
- Good chemical and wear resistance
- Low odour during application

TIP

Use the standard B95 (non self levelling) for sloped or vertical applications, such as ramps and lower parts of the wall that connect to the floor.



ColourShop®

Technical reference

	Virtually solvent-free
Coverage:	2 m ² /l. at 500 µm dry
Dry to touch:	16 hrs
Dry to recoat:	24 hrs
Colours:	Tintable (RAL pastel colours)
Pack sizes:	5L, 20L
Substrates:	Horizontal concrete floors or asphalt-concrete floors
Recoatable with:	RUST-O-THANE® 9600