


# B95 SL

## SELF-LEVELLING EPOXY SYSTEM

2-component flexible floor coating

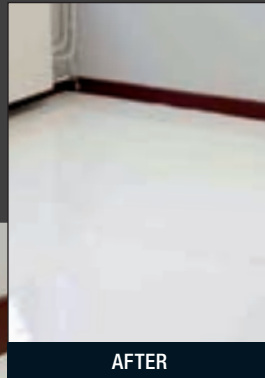

- Very low solvent content
- Applied directly to damp surfaces
- Good chemical and wear resistance
- Low odour during application

**TIP** Use the standard B95 (non self levelling) for sloped or vertical applications, such as ramps and lower parts of the wall that connect to the floor.



### Technical reference

	Virtually solvent-free
<b>Coverage:</b>	2 m <sup>2</sup> /l. at 500 µm dry
<b>Dry to touch:</b>	16 hrs
<b>Dry to recoat:</b>	24 hrs
<b>Colours:</b>	Tintable (RAL pastel colours)
<b>Pack sizes:</b>	5L, 20L
<b>Substrates:</b>	Horizontal concrete floors or asphalt-concrete floors
<b>Recoatable with:</b>	RUST-O-THANE® 9600