

769

DAMP-PROOF RUST PRIMER


Single pack rust primer for application to sound rusted surfaces



**Proven formula
since 1921!**



Minimal surface preparation (direct to rust), direct application to moist surfaces.

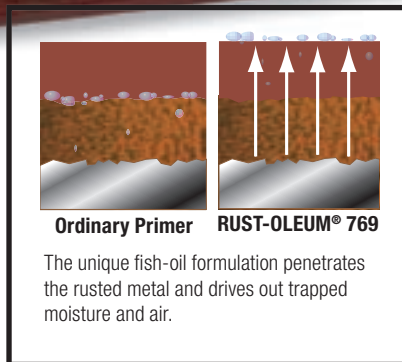

Technical reference	
	Solvent based
Coverage:	14,5 m ² /l. at 35 µm dry
Dry to touch:	4 hrs
Dry to recoat:	24 hrs
Colours:	Red brown + tintable
Pack sizes:	1L, 5L, 20L
Substrates:	Sound rusted steel (slightly damp)
Recoatable with:	1060/1080, 7500 ALKYTHANE® For more technical information see page 64-67

- Minimal surface preparation (manual derusting)
- Unique formula based on fish oil
- Penetrates the rust to the metal
- Expels moisture & air and encapsulates rust
- Durable corrosion protection, both with and without topcoat.
- Low odour, free of lead and chromates
- Overcoatable with virtually all paint systems



769 - The wonder primer that started it all!

Scottish-born sea captain Robert Fergusson noticed that the rusty deck of his vessel stopped corroding in places where fish oil had been spilled. This discovery inspired the captain to develop the first fish oil-based anticorrosion paint. In 1921 he perfected a type of paint that prevented rust and was capable of drying overnight without leaving any unpleasant odours. RUST-OLEUM® Corporation was born.